


Serge Ferrari

Flexlight
Advanced 902 S2

Longevity and
easy maintenance

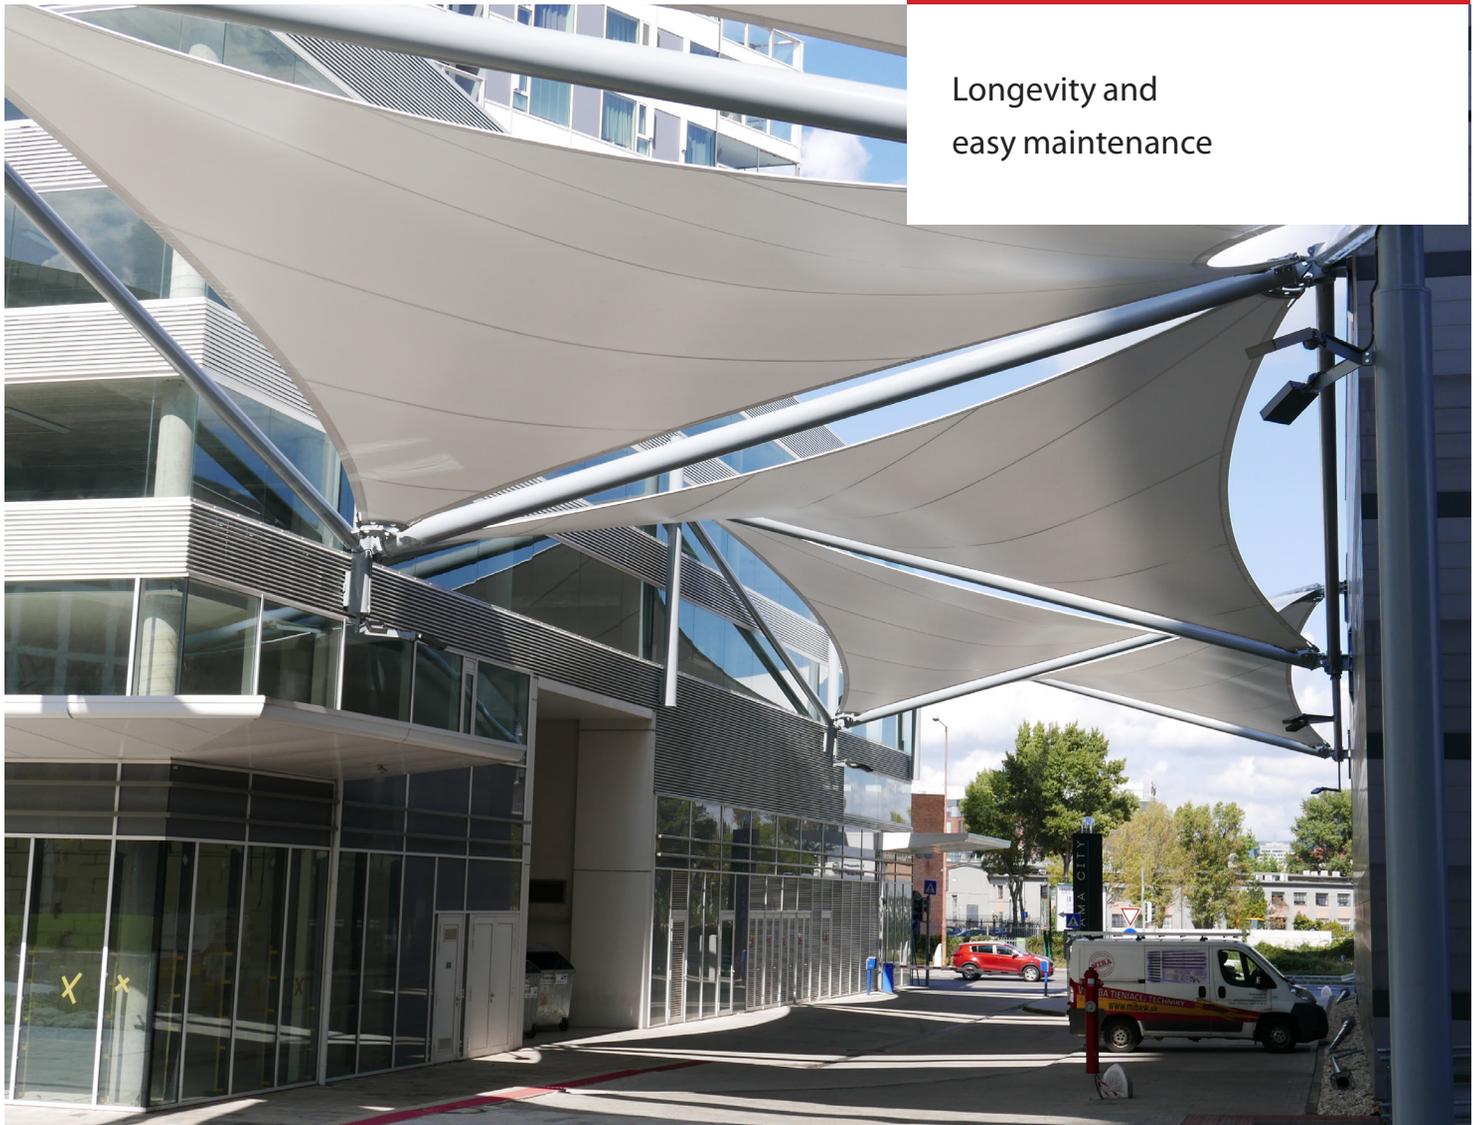

902-8636 S2

Flexlight

Advanced 902 S2

Main applications

- Covered outdoors
- Sport hall roofs
- Shading structures

Major advantages

- Long lasting and low maintenance
- Controlled color per translucency (VISU service)
- High dimensional stability due to Précontraint® technology

	■ Technical specifications	Standards
Surface treatment (top/back)	S2 PVDF / PVDF	
Yarn	High tenacity Polyester 1100 Dtex Low wick treatment for anticapillarity	
Weight	950 g/m ²	EN ISO 2286-2
Width	267 cm	
■ Physical properties		
Tensile strength (warp/weft)	420 / 400 daN/5 cm	EN ISO 1421
Tear resistance (warp/weft)	55 / 50 daN	DIN 53.363
Adhesion	12 daN/5 cm	EN ISO 2411
<p>> The technical data here above are average values with +/-5% tolerance</p>		
■ Flame retardancy		
Euroclass	B-s2,d0	EN 13501-1
DIN standard	B1	DIN 4102-1
<p>> Other fire certificates available on demand</p>		
■ Thickness and dimensional stability		
Thickness	0.72 mm	
Elongation 24 h -10 daN/5 cm (warp/weft)	< 1.2% / < 1.2%	EN 15977
Residual elongation	< 0.5% / < 0.5%	EN 15977
■ Thermal and acoustic performances		
Heat transfer coefficient (vertical/horizontal)	U = 5.6 / 6.4 W / sqm / °C	Calculated
Acoustic weakening index	13 dBA	ISO 140-3 & ISO 717-1
■ Solar optical values		
Visible light Transmittance (Tv)	9 %	NFP 38511
	5 %	EN 410
Visible light Reflexion (Rv)	87%	EN 410
Solar Transmittance (Ts)	7%	
Solar Reflexion (Rs)	79%	
Solar factor (g)	12.5%	
UV transmittance	0%	
Solar Reflectance Index (SRI)	90.5%	ASTM E1980-01 (Approach II)
■ Certifications, labels, guarantees, recycling		

ISO 9001
ISO 14001



Precontraint
technology

15-year
warranty

CSR and LEED reports
available on request

The buyer of our products is fully responsible for their application and their transformation with regard to any possible third party. The buyer of our products is responsible for their implementation and installation according to the standards, workmanship and safety regulations in force in destination countries. For information on our contractual warranty, please refer to the relevant terms and conditions. The values quoted above represent results of tests performed in compliance with common design practices and are provided for information only to enable customers to make the best use of our products. Our products are subject to changes based on technical advances and we reserve the right to modify their characteristics at any time. The buyer of our products is responsible for checking the validity of the above data.

Serge Ferrari
lightweight + durable

Serge Ferrari SAS
+33 (0)4 74 97 41 33
sergeferrari.com

